



Data Sheet ABLF2036B


Features

• Lead Free Piezoelectric Bender

Specifications

Parameters	Values	Units
Resonant Frequency	$3,600 \pm 500$	Hz
Resonant Impedance (Max)	500	Ohms
Max Input Voltage	30	Vp-p
Capacitance (@ 120 Hz)	25,000 ± 30%	pF
Plate Material	Brass	-
Storage Temperature	-20 ~ + 70	°C
Operating Temperature	-20 ~ +60	°C
Environmental Compliances	Rohs/reach	

Dimensions

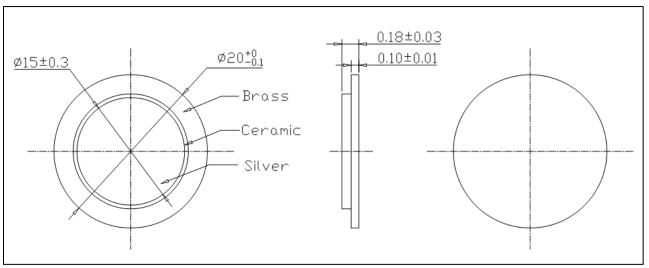

©2023, PUI Audio Inc.

Packaging

Roll	200 pcs	
Tray	6,000 pcs	
Carton	18,000 pcs	

Specifications Revisions

Revision	Description	Date
Α	RELEASED FROM ENGINEERING	7/14/2023

Note:

- 1. Unless otherwise specified:
 - A. All dimensions are in millimeters.
 - B. Default tolerances are ±0.5mm and angles are ±3°.
- 2. Specifications subject to change or withdrawal without notice.