



PUIaudio



Data Sheet

AS04004MR-3F

The **AS04004MR-3F** is designed for applications that require extended, flat high frequency response and benefit from low THD.

Features:


- 88dB SPL: 1W dissipation, distance = 0.5m
- 5.0W continuous dissipation
- 1500Hz free-air resonance
- 40mm diameter x 11.5mm dimensions

Specifications


(Specifications measured with following conditions: ambient temperature; $15^{\circ}\text{C} \leq T_A \leq 35^{\circ}\text{C}$, relative humidity; $25\% \leq RH_A \leq 75\%$, according to standard GB/T9396-1996, unless otherwise stated. Judgement Condition: ambient temperature; $20 \pm 2^{\circ}\text{C}$; relative humidity; $63\% \leq RH_A \leq 67\%$. Product shelf life valid for 12 months.

Parameters	Values	Units
Rated Input Power	5.0	Watts
Maximum Input Power	10.0	Watts
Impedance	$4 \pm 15\%$	Ohms
Sensitivity (SPL) $P_{DRIVE} = 1.0\text{W}$, distance = 0.5m f = ave. 2.0kHz, 3.0kHz, 4.0kHz, 5.0kHz	88 ± 3	dB
Resonant Frequency (f_0) 5cc sealed back-volume	$1500 \pm 20\%$	Hz
Frequency Range (-10dB SPL)	$f_0 \leq f \leq 20,000$	Hz
Distortion f = 1kHz, $P_{DRIVE} = 1.0\text{W}$	≤ 5	%
Frame Material	ABS	-
Magnet Material	NdFeB	-
Diaphragm Material	SILK	-
Weight	27.3	gm
Buzz, Rattle, etc.	Not audible with $P_{DRIVE} = 5.0\text{W}$, sine wave	-
Polarity	Applying positive dc current to "+" terminal moves diaphragm forward	-
Storage Temperature	$-25 \leq T_S \leq 60$	$^{\circ}\text{C}$
Operating Temperature	$-25 \leq T_O \leq 60$	$^{\circ}\text{C}$
Environmental Compliances	ROHS/REACH	-


Measurement Method (Measured with $P_{DRIVE} = 1.0W$, distance = 0.5m, Temperature: 23 ~ 25°C, Relative Humidity: 55% (max).)

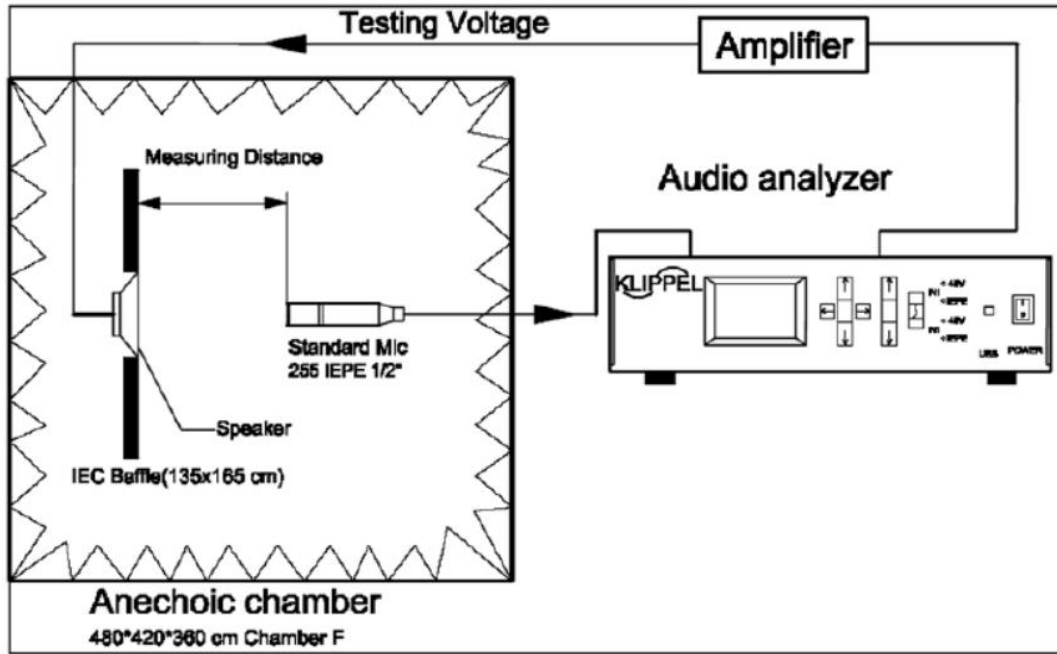


Typical Frequency Response ($P_{DRIVE} = 1.0W$, distance = 0.5m)

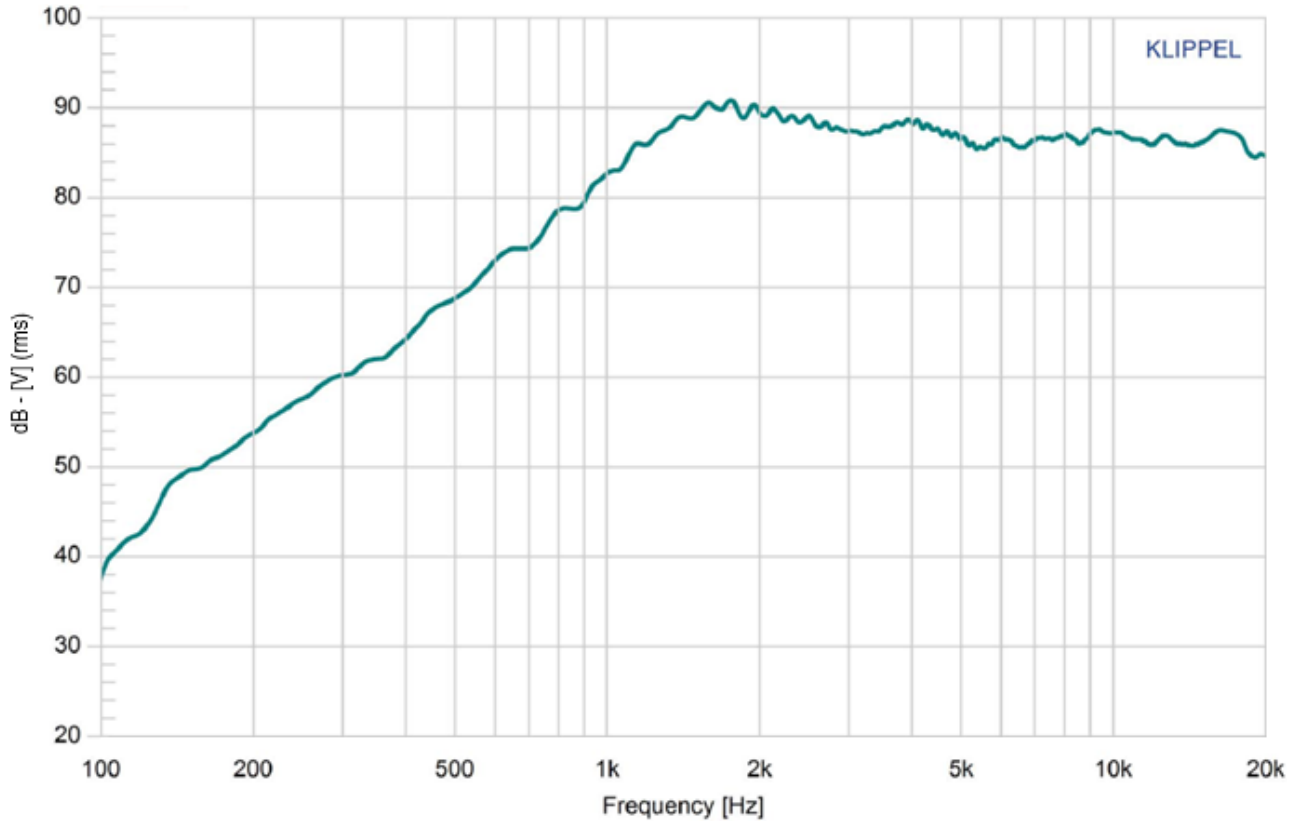


Typical THD vs. Frequency ($P_{DRIVE} = 1.0W$)

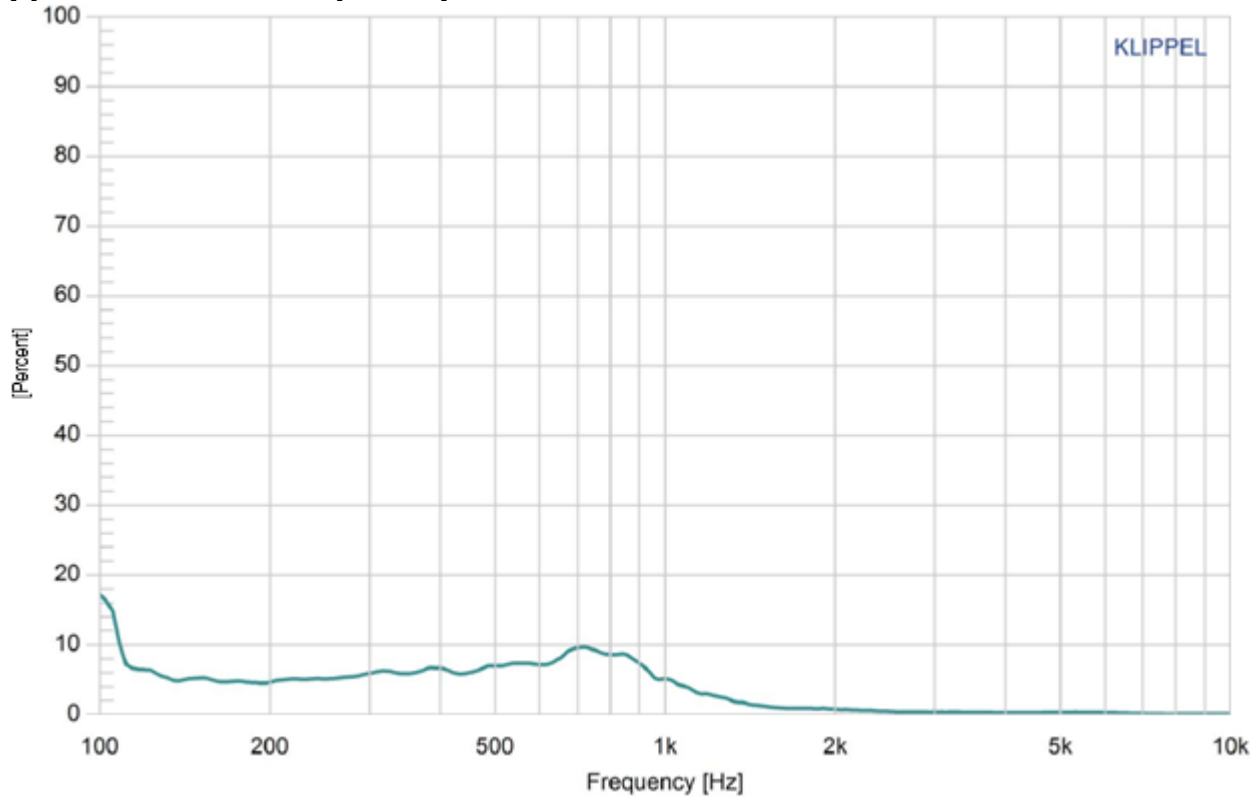


Impedance Response

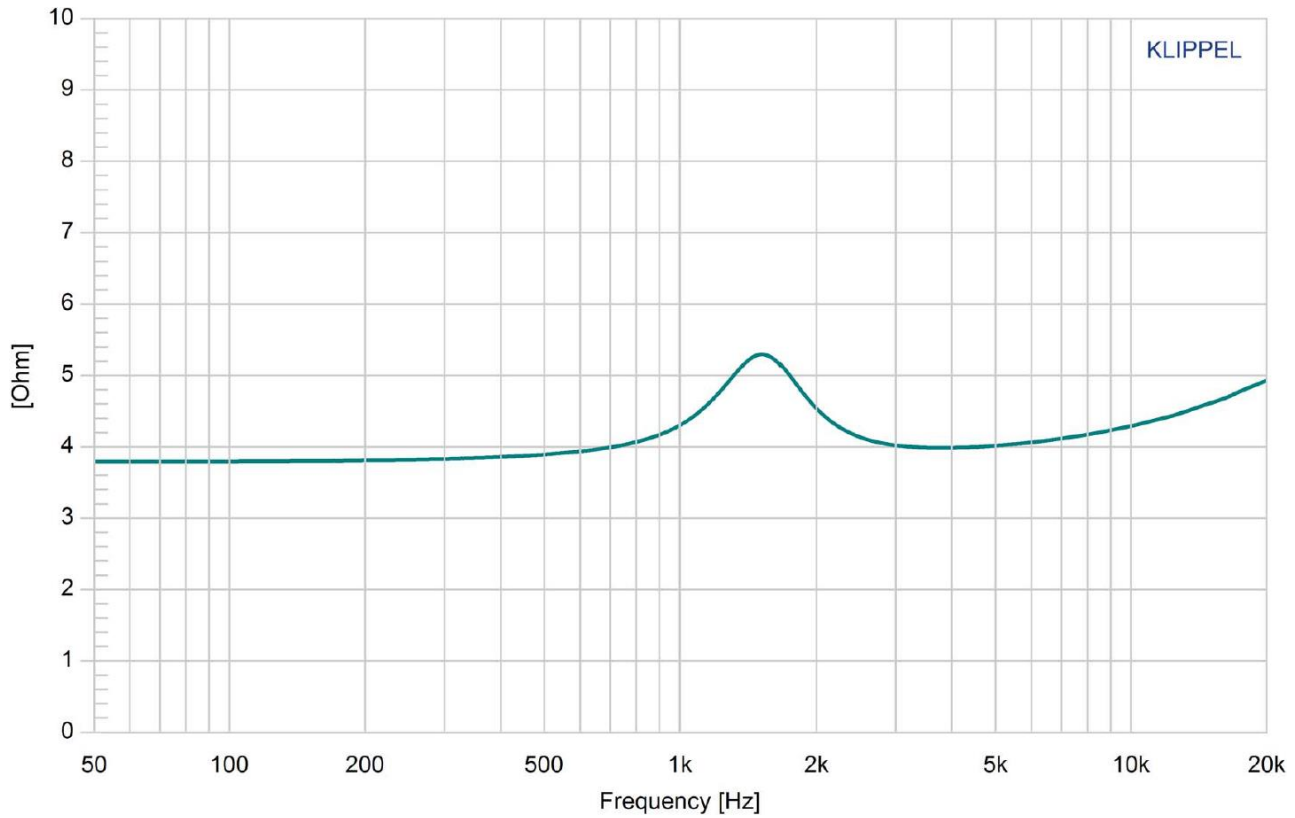


Reliability Testing

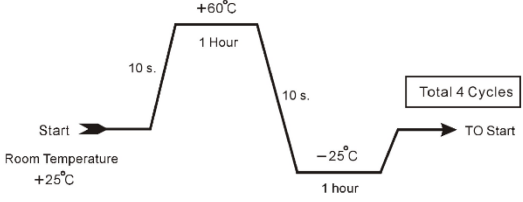Type of Test	Test Specifications	Judgement
High Temperature Test GB2423.2-81	96 hours at +60°C ± 2°C followed by one hour in normal room temperature	SPL shall not deviate by ±3dB. Resonant frequency shall not deviate by ±50Hz. (compared with pre-test measurement)
Low Temperature Test GB2423.1-81	96 hours at -25°C ± 2°C followed by one hour in normal room temperature	
Humidity Test GB5170.18-87	96 hours at +40°C ± 2°C with relative humidity between 90% and 95% followed by 6 hours in normal room temperature	
Temperature Cycle Testing GB5170.18-87		SPL shall not deviate by ±4dB. Resonant frequency shall not deviate by ±80Hz. (compared with pre-test measurement)
Vibration Test GB11606.8-89	Frequency 30±15 Hz, Amplitude 1.5 mm for 3 Hours	SPL shall not deviate by ±3dB. (compared with pre-test measurement)
Drop Test GB2423.8-81	75 cm free falling on concrete floor, 10 times.	
Load Test GB/T12060.5-2011	Speaker should not fail after applying 20Hz ~ 20kHz pink noise with HPF rated power input (RMS), 96 hours.	



Dimensions (Tolerance: ±0.5mm, unless otherwise specified.)

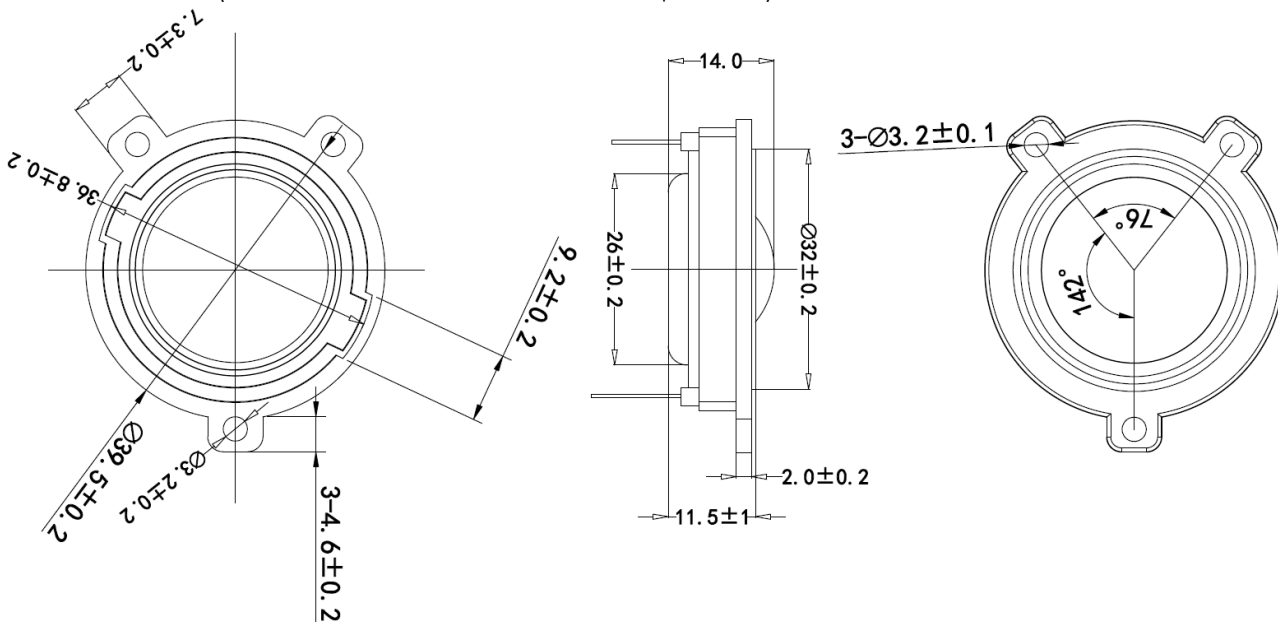

Packaging

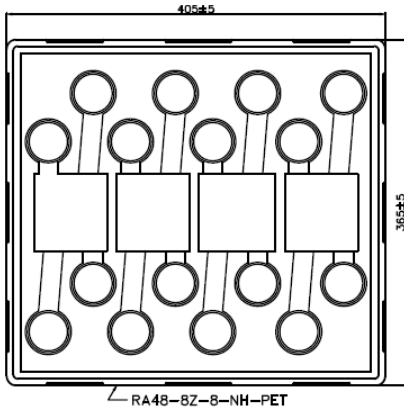

NOTE
16 PCS per Layer
Total 5 Layer per box
Total 80 PCS per box
41.5*38.5*20.5 cm
HF+ROHS 2

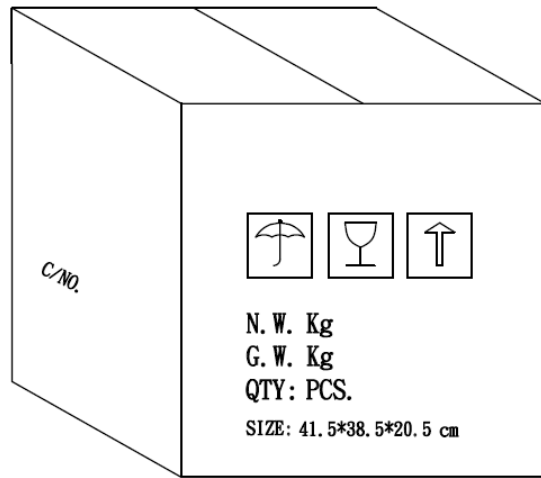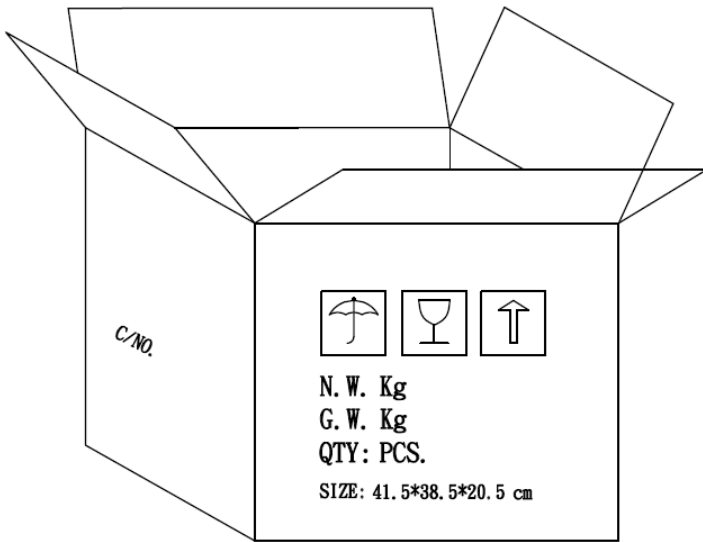

Measurement & Standard Reference

Abstract from GB/T 9396-1996 and IEC 268-5:1989: methods of measurement for main characteristics of loudspeakers.

5.1 Rated sine voltage.

A sinusoidal signal voltage specified by the manufacturer which makes the speaker work continuously in the rated frequency range, without causing electrical or mechanical damage to the speaker. The continuous voltage time is 1 hour.

5.2 Rated sine power.

The rated sine power corresponding with the rated sine voltage defined by: U_s^2/R , where U_s indicates the rated sin voltage and R indicates the rated impedance of the speaker.

5.3 Rated noise power.

The rated sine power corresponding with the rated sine voltage defined by: U_n^2/R , where U_n indicates the rated sin voltage and R indicates the rated impedance of the speaker.

Specifications Revisions

Revision	Description	Date	Approved
A	Released from Engineering	3/24/2024	KH

Notes:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
- Specifications subject to change or withdrawal without notice.