



PUI audio



Data Sheet

AS03104SR

The **AS03104SR** is designed for applications that require extended, flat high frequency response and benefit from very low THD.


Features:

- 88dB SPL: 1W dissipation, distance = 0.5m
- 12.0W continuous dissipation
- 1580Hz free-air resonance
- 31mm diameter x 14mm (22mm including terminals) dimensions


Specifications (Specifications measured with following conditions: ambient temperature; $15^{\circ}\text{C} \leq T_A \leq 35^{\circ}\text{C}$, relative humidity; $25\% \leq RH_A \leq 75\%$, according to standard GB/T9396-1996, unless otherwise stated. Judgement Condition: ambient temperature; $20 \pm 2^{\circ}\text{C}$; relative humidity; $63\% \leq RH_A \leq 67\%$. Product shelf life valid for 12 months.

Parameters	Values	Units
Rated Input Power	12.0	Watts
Maximum Input Power	15.0	Watts
Impedance	$4.0 \pm 15\%$	Ohms
Sensitivity (SPL) $P_{\text{DRIVE}} = 1.0\text{W}$, distance = 0.5m f = ave. 2.0kHz, 3.0kHz, 4.0kHz, 5kHz	88 ± 3	dB
Resonant Frequency (f_0) 4cc sealed back-volume	$1580 \pm 20\%$	Hz
Frequency Range (-10 dB)	$720 \leq f \leq 20,000$	Hz
Total Harmonic Distortion (THD) f = 1kHz, $P_{\text{DRIVE}} = 1.0\text{W}$	<5 %	-
Frame Material	ABS	-
Magnet Material	NdFeB	-
Diaphragm Material	Silk	-
Weight	24.1	gm
Buzz, Rattle, etc.	Not audible with $P_{\text{DRIVE}} = 12.0\text{W}$, sine wave	-
Polarity	Applying positive dc current to "+" terminal moves diaphragm forward	-
Operating Temperature Range	$-25 \leq T_O \leq 50$	$^{\circ}\text{C}$
Storage Temperature Range	$-25 \leq T_S \leq 60$	$^{\circ}\text{C}$
Environmental Compliance	RoHS/REACH	-


Measurement Method (measured with $P_{DRIVE} = 1.0$, distance = 0.5m)

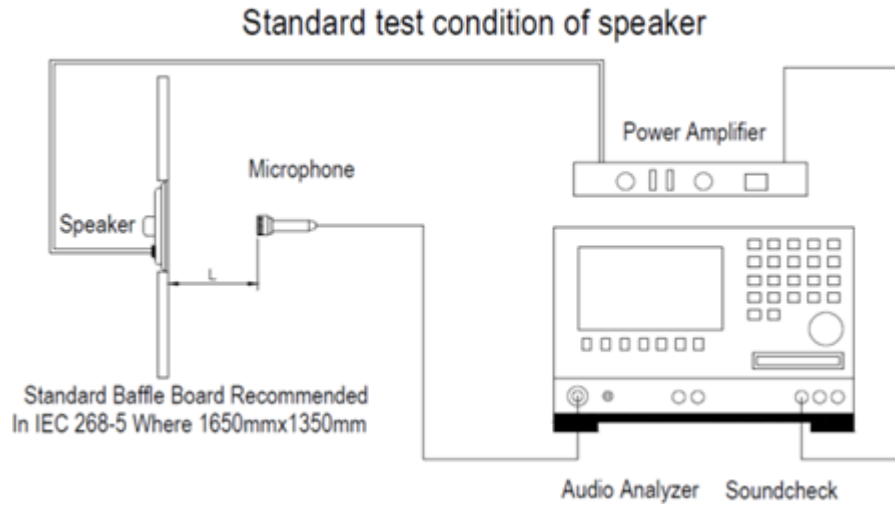


Typical Frequency Response ($P_{DRIVE} = 2.0W$, distance = 0.1m, 4cc sealed back-volume)

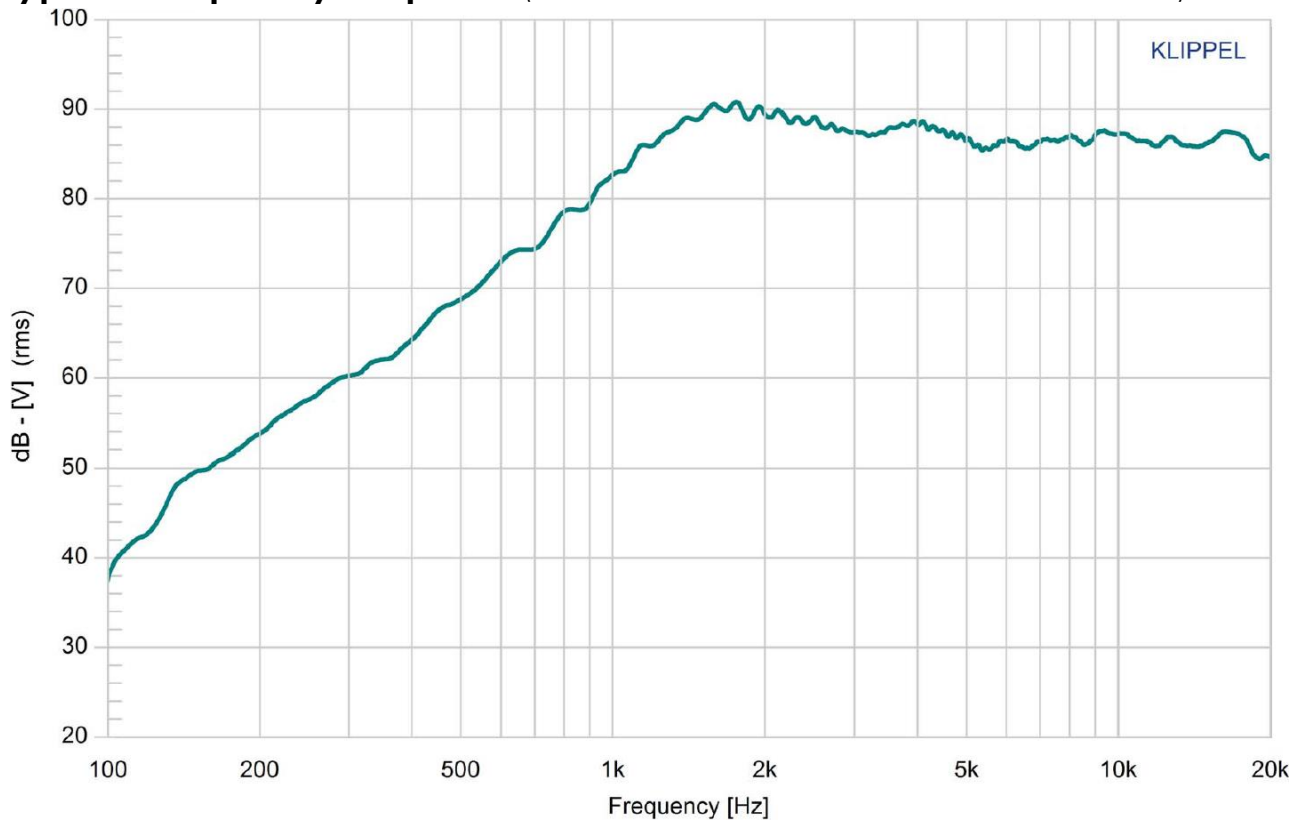


Typical THD vs. Frequency (P_{DRIVE} = 2.0W, 4cc sealed back-volume)

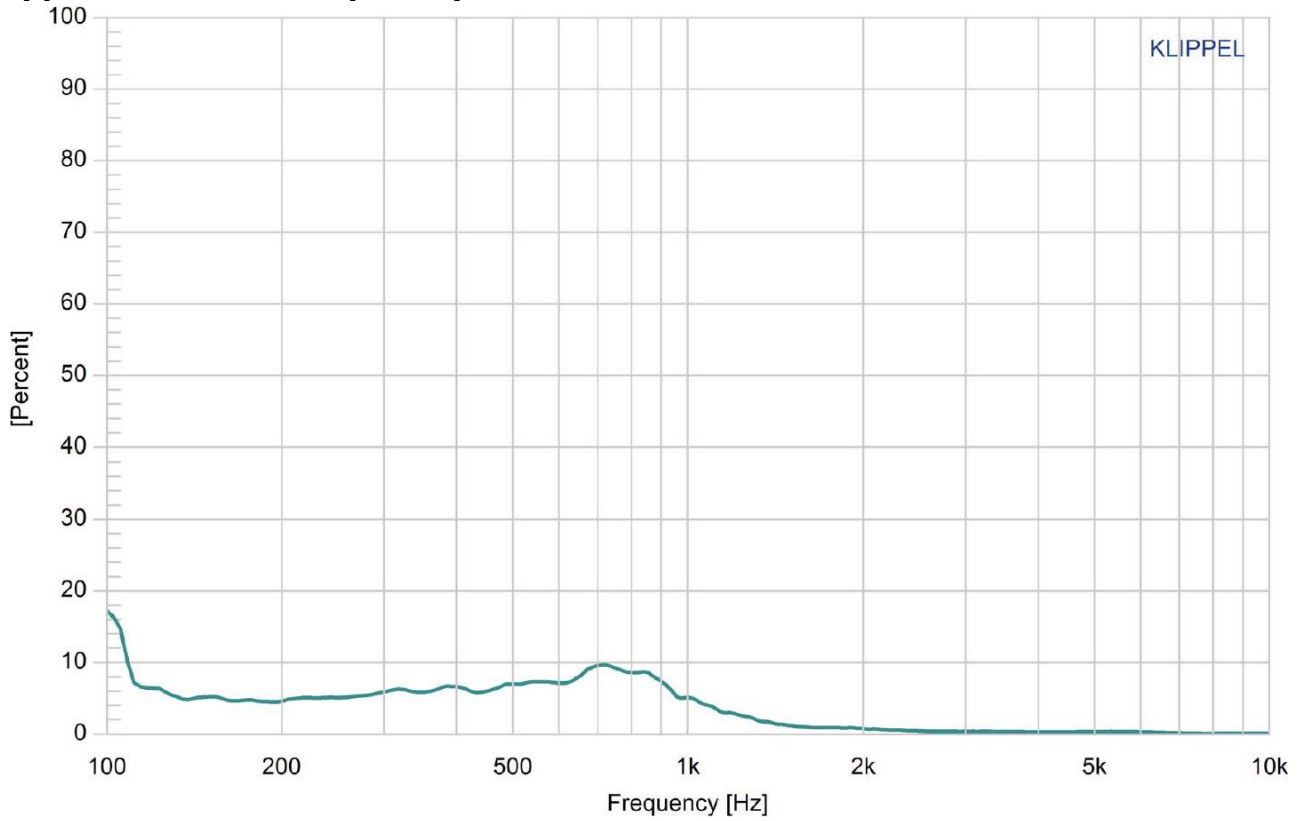


Impedance Response

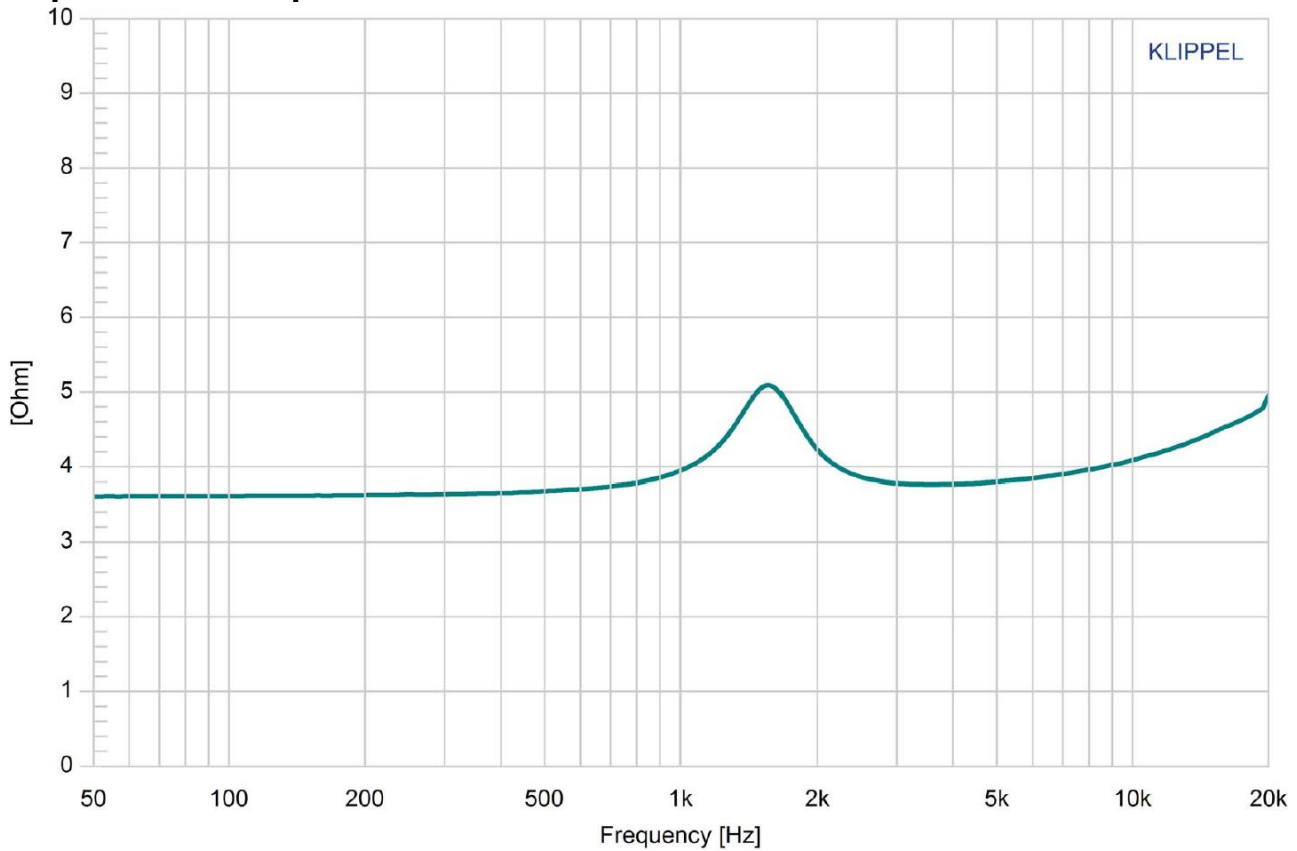


Reliability Testing

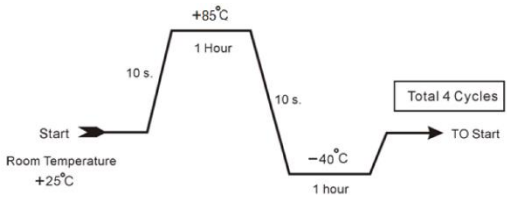Type of Test	Test Specifications	Judgement
High Temperature Test GB2423.2-81	96 hours at +85°C ± 2°C followed by one hour in normal room temperature	SPL shall not deviate by ±3dB. Resonant frequency shall not deviate by ±50Hz. (compared with pre-test measurement)
Low Temperature Test GB2423.1-81	96 hours at -40°C ± 2°C followed by one hour in normal room temperature	
Humidity Test GB5170.18-87	96 hours at +40°C ± 2°C with relative humidity between 90% and 95% followed by 6 hours in normal room temperature	
Temperature Cycle Testing GB5170.18-87		SPL shall not deviate by ±4dB. Resonant frequency shall not deviate by ±80Hz. (compared with pre-test measurement)
Vibration Test GB11606.8-89	Frequency 30±15 Hz, Amplitude 1.5 mm for 3 Hours	SPL shall not deviate by ±3dB. (compared with pre-test measurement)
Drop Test GB2423.8-81	75 cm free falling on concrete floor, 10 times.	
Load Test GB/T12060.5-2011	Speaker should not fail after applying 20Hz ~ 20kHz pink noise with HPF rated power input (RMS), 96 hours.	



Dimensions (Measured in mm. Tolerance = ±0.2mm, unless otherwise indicated.)

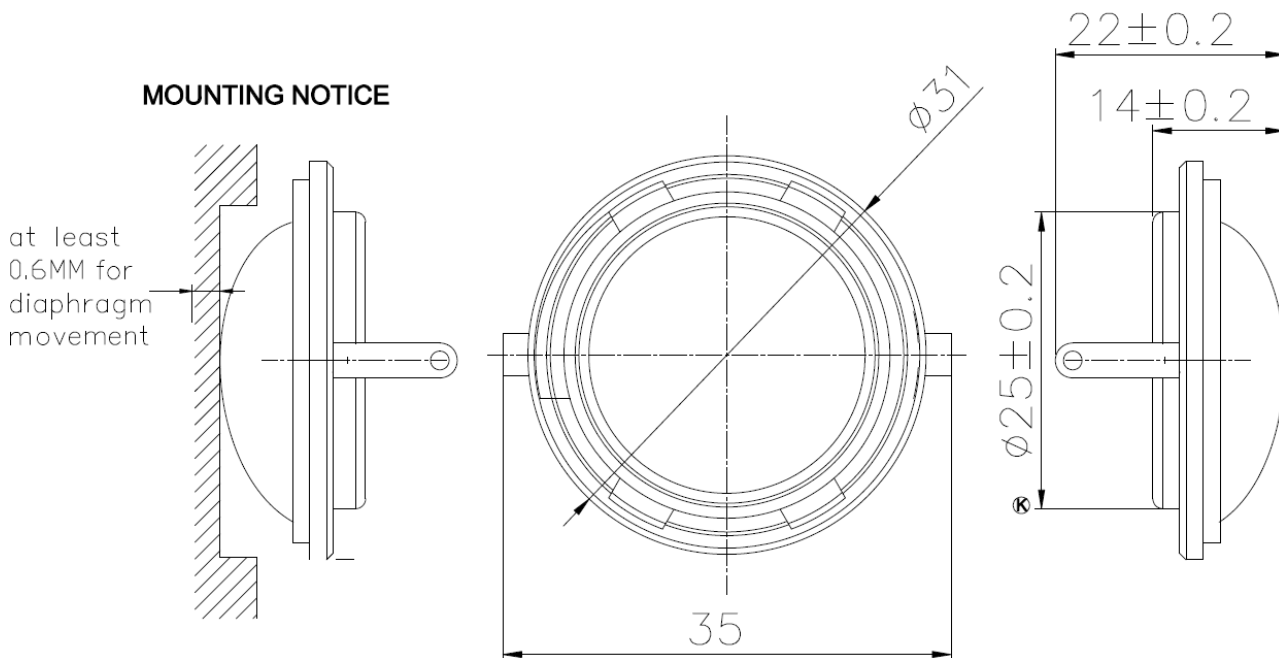

Packaging

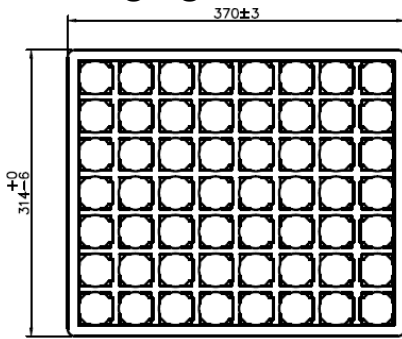

NOTE
56 PCS per Layer
Total 9 Layer per box
Total 504 PCS per box
38.5*32.5*36.5 cm
HF+ROHS 2

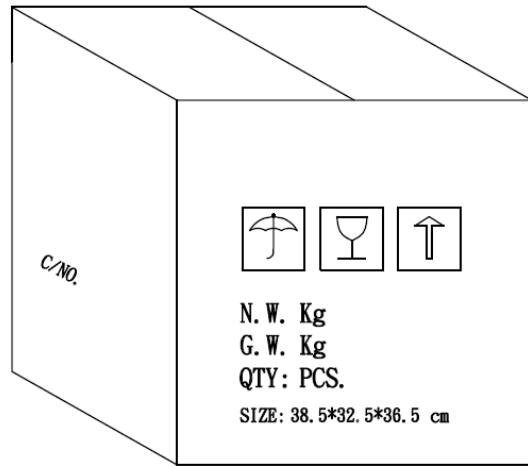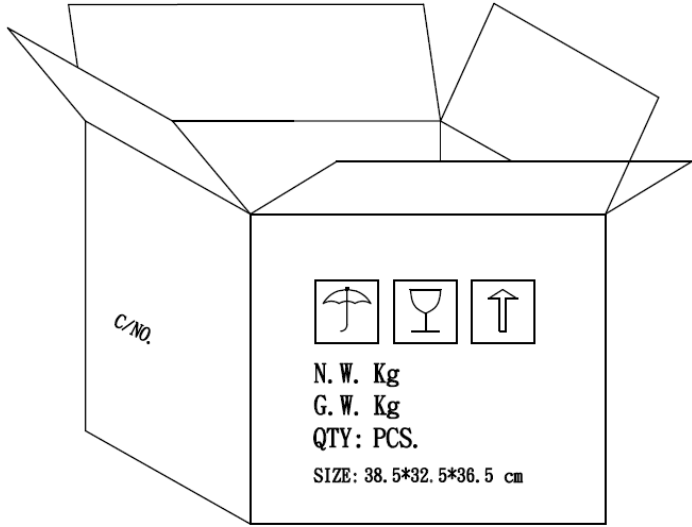

Measurement & Standard Reference

Abstract from GB/T 9396-1996 and IEC 268-5:1989: methods of measurement for main characteristics of loudspeakers.

5.1 Rated sine voltage.

A sinusoidal signal voltage specified by the manufacturer which makes the speaker work continuously in the rated frequency range, without causing electrical or mechanical damage to the speaker. The continuous voltage time is 1 hour.

5.2 Rated sine power.

The rated sine power corresponding with the rated sine voltage defined by: U_s^2/R , where U_s indicates the rated sin voltage and R indicates the rated impedance of the speaker.

5.3 Rated noise power.

The rated sine power corresponding with the rated sine voltage defined by: U_n^2/R , where U_n indicates the rated sin voltage and R indicates the rated impedance of the speaker.

Specifications Revisions

Revision	Description	Date	Approved
A	Datasheet released from Engineering	03/25/2024	KH

Notes:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.2\text{mm}$ and angles are $\pm 3^\circ$.
- Specifications subject to change or withdrawal without notice.