



PUI audio



Data Sheet

AS03204AS-HT-WP

The **AS03204AS-HT-WP** is designed for applications that require robust low-frequency response and low THD in compact designs.

Features:


- 83dB SPL: $P_{DRIVE} = 1.0W$, distance = 0.5m
- 3.0W continuous dissipation
- 200Hz free-air resonance
- 31.7mm diameter x 16.5mm dimensions

Specifications


(Specifications measured with following conditions: ambient temperature; $15^{\circ}C \leq T_A \leq 35^{\circ}C$, relative humidity; $25\% \leq RH_A \leq 75\%$, according to standard GB/T9396-1996, unless otherwise stated. Judgement Condition: ambient temperature; $20 \pm 2^{\circ}C$; relative humidity; $63\% \leq RH_A \leq 67\%$. Product shelf life valid for 12 months.

| Parameters | Values | Units |
|--|--|-------------|
| Rated Input Power | 3.0 | Watts |
| Maximum Input Power | 4.0 | Watts |
| Impedance | $4 \pm 15\%$ | Ohms |
| Sensitivity (SPL) $P_{DRIVE} = 1.0W$, distance = 0.5m f = ave. 0.6kHz, 0.8kHz, 1.0kHz, 1.2kHz | 83 ± 3 | dB |
| Resonant Frequency (f_0) | $200 \pm 20\%$ | Hz |
| Frequency Range (-10 dB) | $f_0 \leq f \leq 20,000$ | Hz |
| Total Harmonic Distortion (THD) f = 1kHz, $P_{DRIVE} = 1.0W$ | ≤ 5 | % |
| Frame Material | PBT + 15% GF | - |
| Magnet Material | NdFeB | - |
| Diaphragm Material | Aluminum + PU | - |
| Weight | 16.6 | gm |
| Ingress Protection Rating | IPX5 | - |
| Buzz, Rattle, etc. | Not audible with $P_{DRIVE} = 3.0W$, sine wave, $160 \leq f \leq 20,000$ | - |
| Polarity | Applying positive dc current to "+" terminal moves diaphragm forward | - |
| Operating Temperature | $-25 \leq T_O \leq 50$ | $^{\circ}C$ |
| Storage Temperature | $-40 \leq T_S \leq 85$ | $^{\circ}C$ |
| Environmental Compliances | RoHS/REACH | - |


Measurement Method (measured with $P_{DRIVE} = 1.0$, distance = 0.5m)

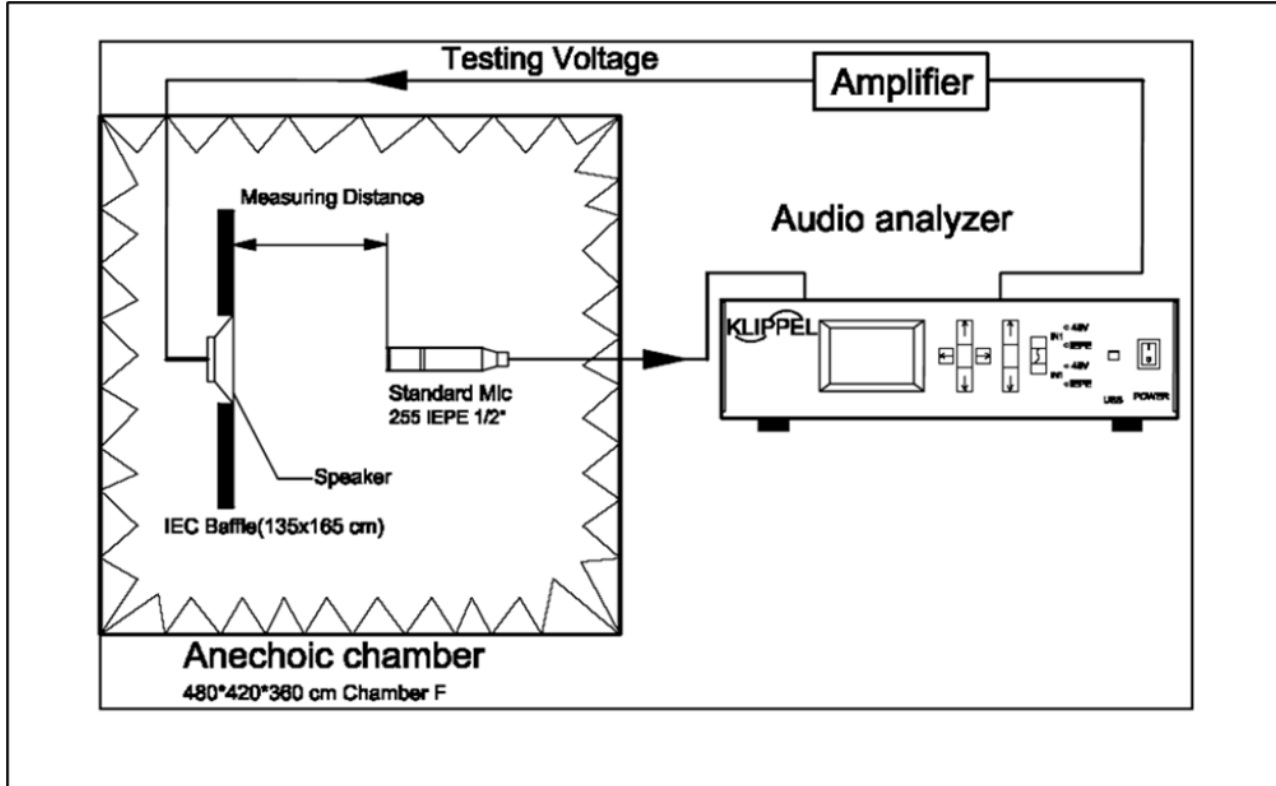


Typical Frequency Response ($P_{DRIVE} = 1W$, distance = 0.5m)

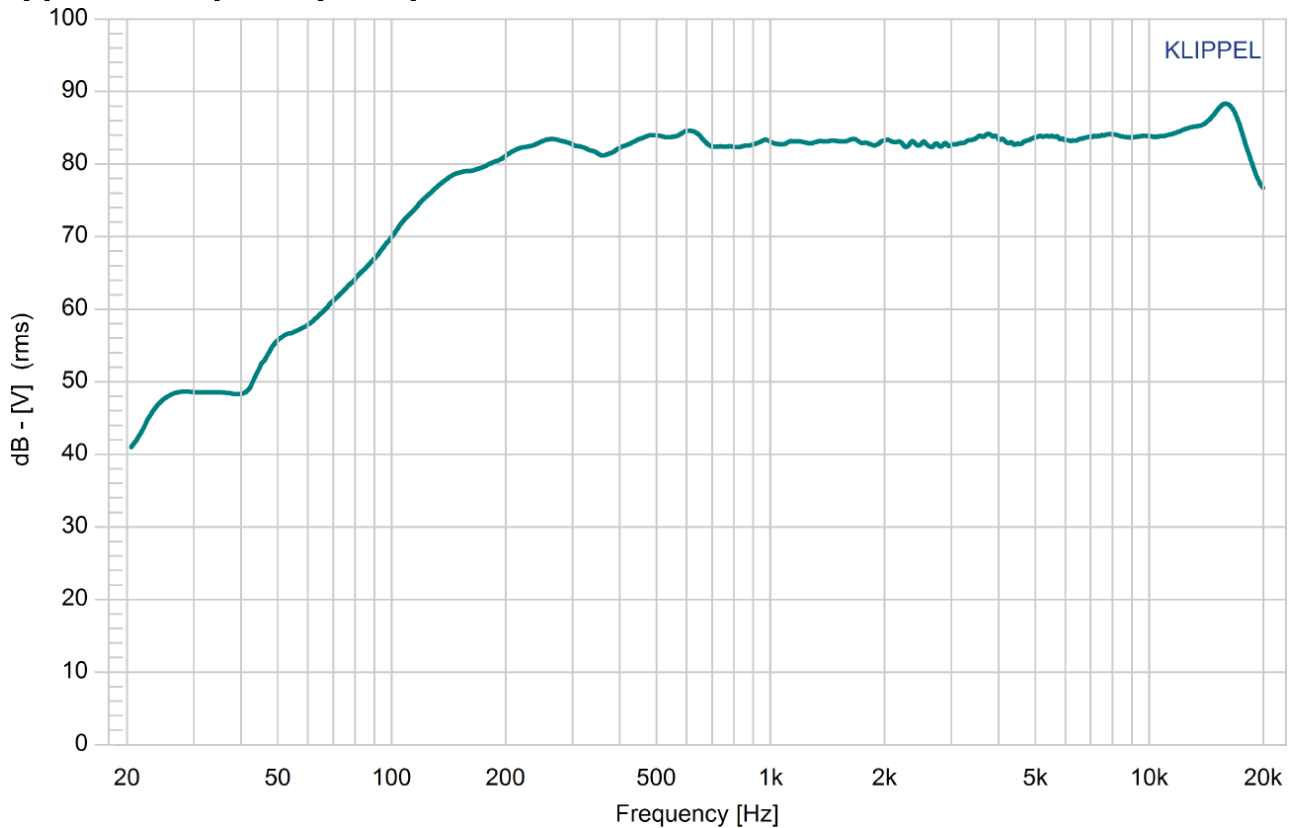


Typical THD vs. Frequency ($P_{DRIVE} = 1.0W$)

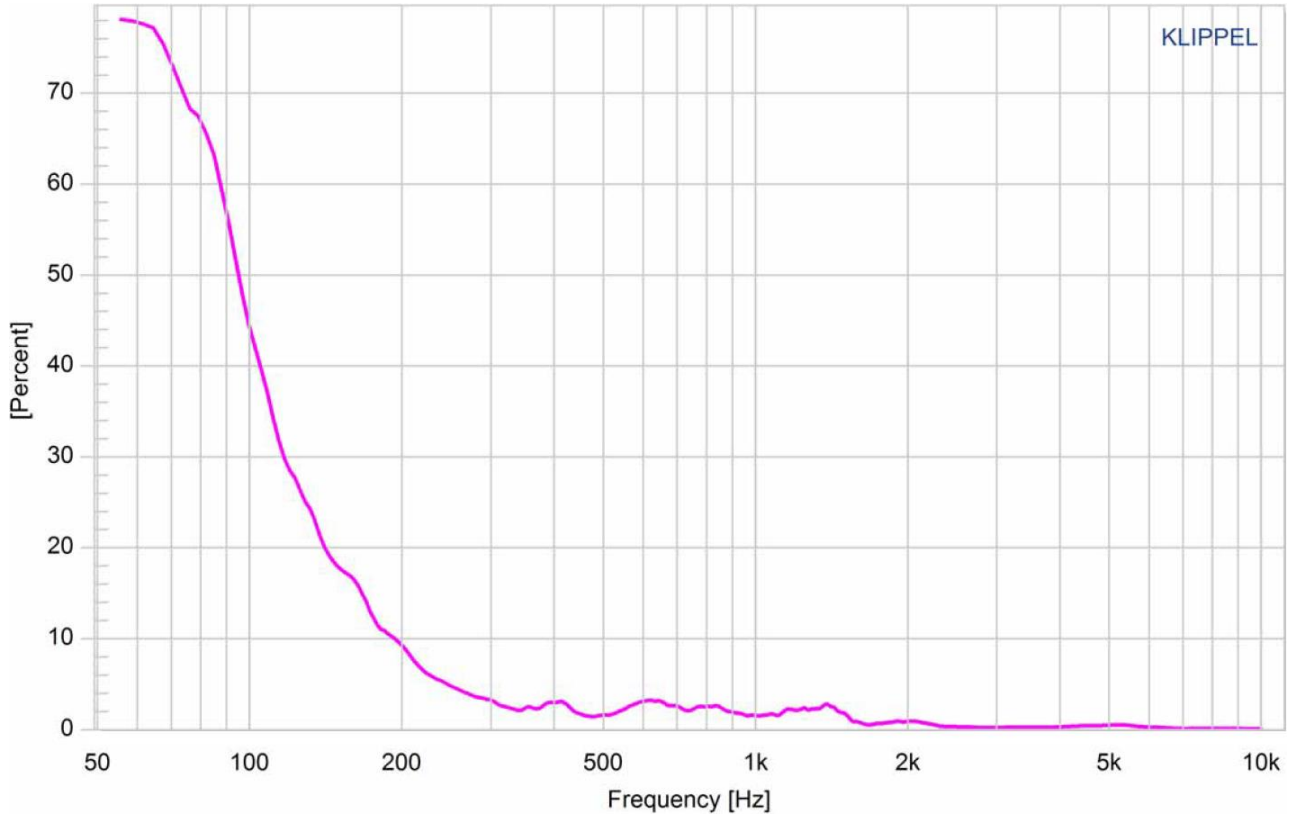


Typical Impedance Response

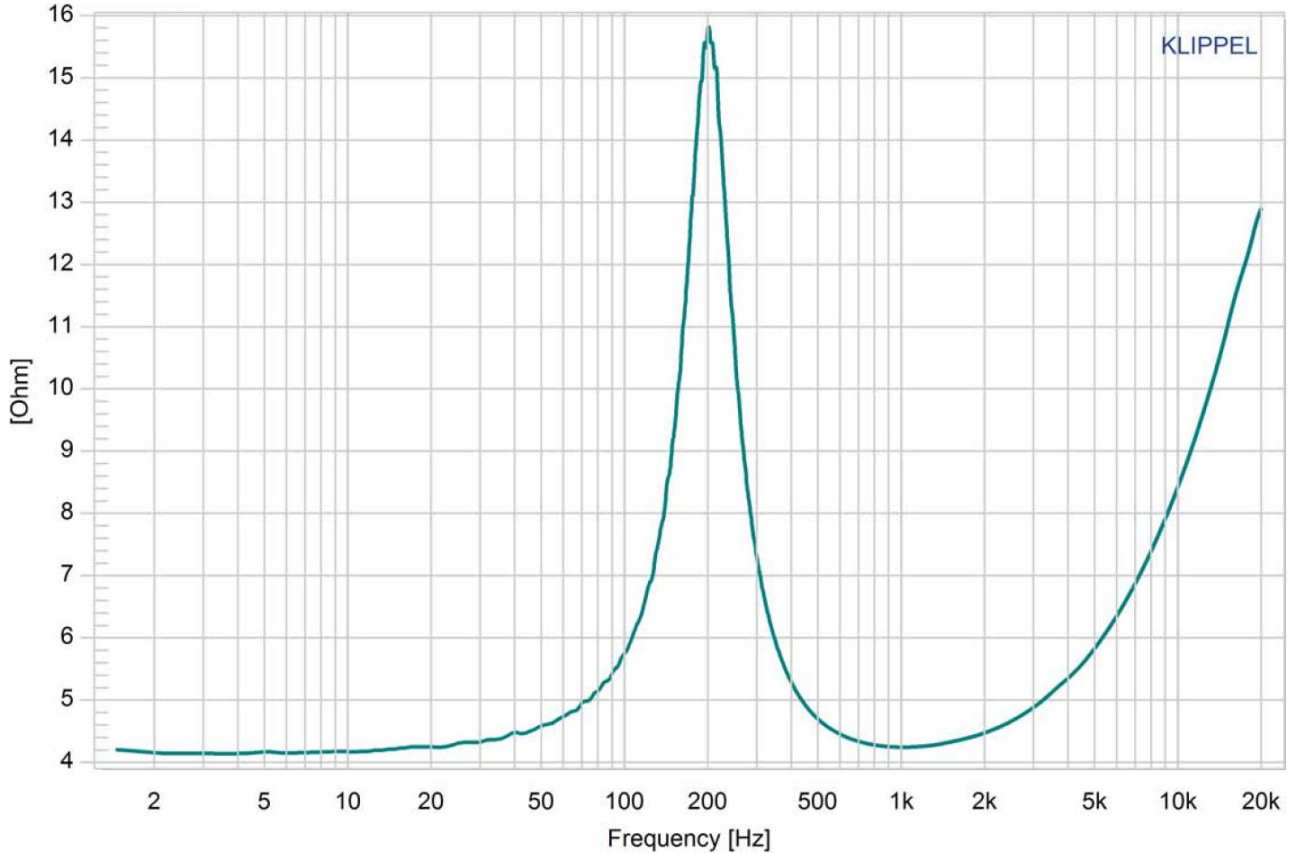


Reliability Testing
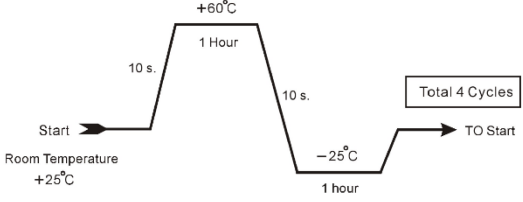
| Type of Test | Test Specifications | Judgement |
|---|---|--|
| High Temperature Test GB2423.2-81 | 96 hours at +60°C ± 2°C followed by one hour in normal room temperature | SPL shall not deviate by ±3dB. Resonant frequency shall not deviate by ±50Hz. (compared with pre-test measurement) |
| Low Temperature Test GB2423.1-81 | 96 hours at -25°C ± 2°C followed by one hour in normal room temperature | |
| Humidity Test GB5170.18-87 | 96 hours at +40°C ± 2°C with relative humidity between 90% and 95% followed by 6 hours in normal room temperature | |
| Temperature Cycle Testing GB5170.18-87 |  | SPL shall not deviate by ±4dB. Resonant frequency shall not deviate by ±80Hz. (compared with pre-test measurement) |
| Vibration Test GB11606.8-89 | Frequency 30±15 Hz, Amplitude 1.5 mm for 3 Hours | SPL shall not deviate by ±3dB. (compared with pre-test measurement) |
| Drop Test GB2423.8-81 | 75 cm free falling on concrete floor, 10 times. | |
| Load Test GB/T12060.5-2011 | Speaker should not fail after applying 20Hz ~ 20kHz pink noise with HPF rated power input (RMS), 96 hours. | |

Dimensions

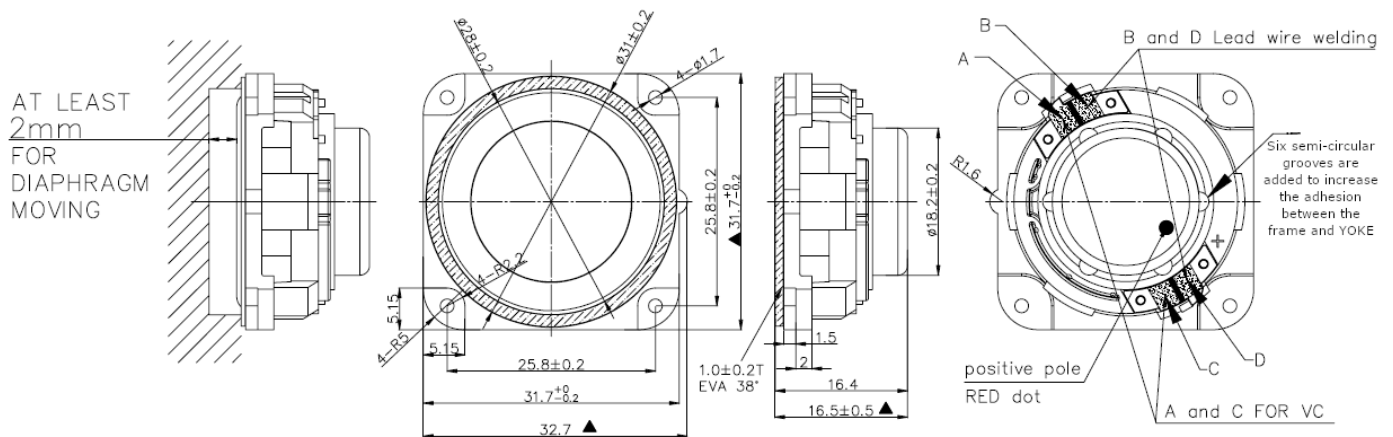

Packaging

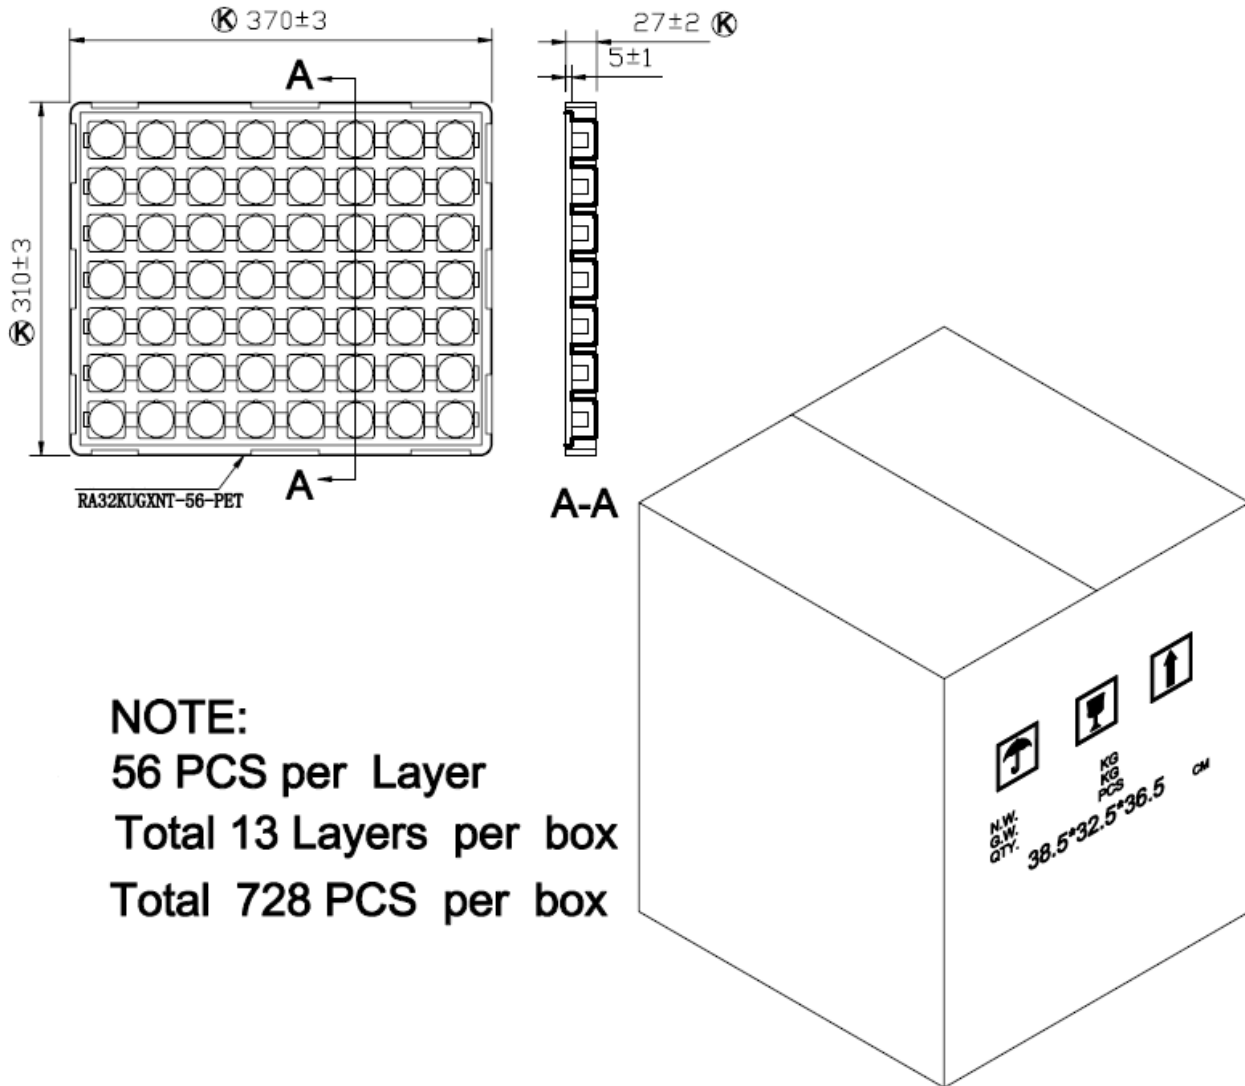

NOTE:
56 PCS per Layer
Total 13 Layers per box
Total 728 PCS per box

Measurement & Standard Reference

Abstract from GB/T 9396-1996 and IEC 268-5:1989: methods of measurement for main characteristics of loudspeakers.

5.1 Rated sine voltage.

A sinusoidal signal voltage specified by the manufacturer which makes the speaker work continuously in the rated frequency range, without causing electrical or mechanical damage to the speaker. The continuous voltage time is 1 hour.

5.2 Rated sine power.

The rated sine power corresponding with the rated sine voltage defined by: U_s^2/R , where U_s indicates the rated sin voltage and R indicates the rated impedance of the speaker.

5.3 Rated noise power.

The rated sine power corresponding with the rated sine voltage defined by: U_n^2/R , where U_n indicates the rated sin voltage and R indicates the rated impedance of the speaker.

Specifications Revisions

| Revision | Description | Date | Approved |
|----------|---------------------------|-----------|----------|
| A | Released from Engineering | 3/24/2024 | KH |

Note:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$, unless otherwise specified.
- Specifications subject to change or withdrawal without notice.