



PUI audio




Data Sheet


AW-10FW-NSVC

Specifications

Parameters	Values	Units
Rated Voltage	24	Vdc
Operating Voltage Range	9 ~ 28	Vdc
Rated Current (Typical)	35	mA
Typical SPL @ 1M	92	dB(A)
Frequency Range	2,700 ~ 3,100	Hz
Sweep Rate	4	Hz
Continuous Tone/ Pulsing Tone	Red (+) & Blue (-)/ Red (+) & Black (-)	-
Case Material/Color	ABS/White	-
Terminal	LEAD WIRE	-
Weight	80	Grams
Ingress Protection Rating	IP65	-
Environmental Compliances	RoHS/REACH	-
Operating Temperature	-25 ~ +70	°C

Dimensions

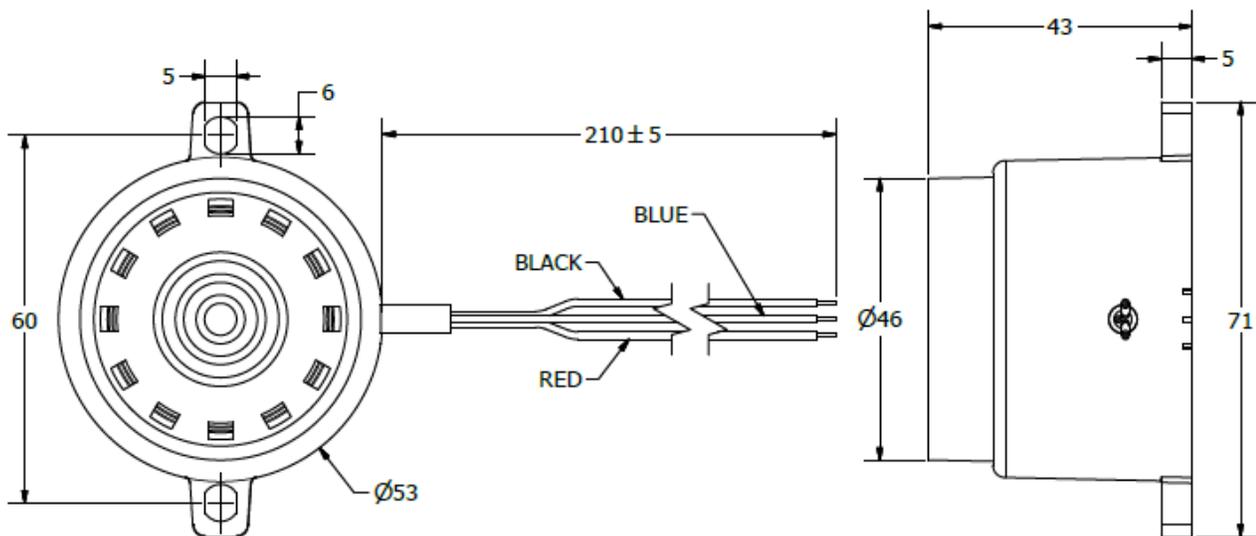

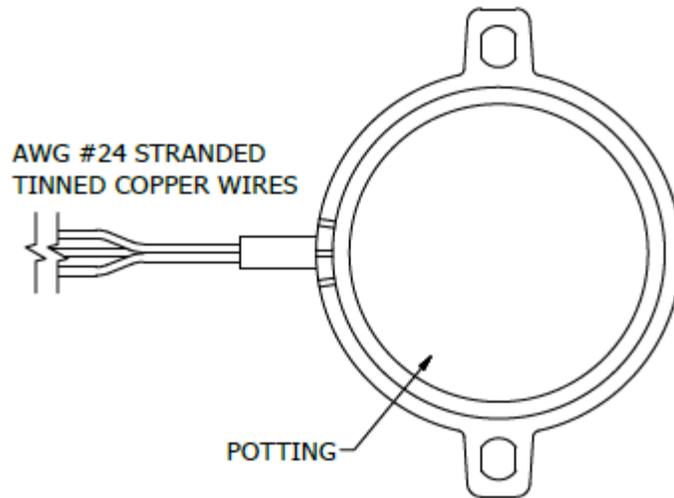

Specifications Revisions

Revision	Description	Date
-	Released from Engineering	12/15/2005
A	Added RoHS Note	5/21/2007
B	Revised Lead Wire Dimension	6/7/2007
C	Revised to Inventor 3-D Drawing Template	5/18/2010
D	Revised Lead Wire Length and Overall Length	8/15/2011
E	Revised Rated Voltage, Current, SPL and Distance	11/22/2021

Note:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
- Specifications subject to change or withdrawal without notice.