This document contains data proprietary to PUI Audio Inc. Any use or reproduction, in any form, without prior written permission of PUI Audio Inc. is prohibited. ©2021, PUI Audio Inc.



### Data Sheet

HD-EMB2212

#### Features:


- Powerful vibration force up to 3.2G
- 21.5mm x 12mm cylindrical design
- 110mA rated current
- 7,500 rpm rated speed

#### **Specifications**

Parameters	Values	Units
Input Voltage (DC)	3.7	V <sub>DC</sub>
Starting Voltage (DC)	1.2	V <sub>DC</sub>
Operating Voltage Range (DC)	$2.0 \sim 5.0$	Vdc
Direction of Rotation	CW	-
Rated Speed	7,500 ± 15%	RPM
Rated Current (Max at $5.0 V_{DC}$ )	110	mA
Starting Current (Max at $3.7 V_{DC}$ )	220	mA
Shaft End Play (Max)	0.35	mm
Mechanical Noise (Max)	50	dBA
Environmental Compliances	RoHS/REACH	-
Weight	5.8	Grams
Storage Temperature	-20 ~ +70	°C
Operating Temperature	-20 ~ +60	°C

This document contains data proprietary to PUI Audio Inc. Any use or reproduction, in any form, without prior written permission of PUI Audio Inc. is prohibited. ©2021, PUI Audio Inc.

### **Measurement Methods**

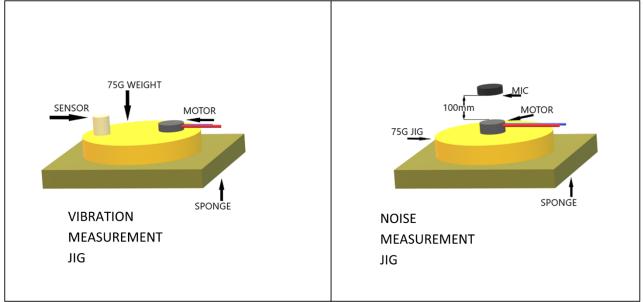


## **Reliability Testing**

Type of Test	Test Specifications	
	Temperature: +60±2°C	
High Temperature Test	Test Duration Time: 72 hours	
	Temperature: -40±2°C	
Low Temperature Test	Test Duration Time: 72 hours	
	Temperature: 40°C	
	Relative Humidity: 90~95%	
Humidity Test	Test Duration Time: 72 hours	
	Temperature Cycle: -30 to +70°C	
	Cycle Time: 2 hours	
Thermal Shock Test	Test Repetition: 10 cycles (20 hours total)	
	Voltage: 3.0 Vdc	
Lifetime test	Test Mode: 1 min On, 1 min Off, as 1 cycle	
	Total Cycles: 5,000	
	Drop Condition: 1.5m onto iron plate at weight 75g	
Drop Test	Test Repetition: 2 times per side (36 total)	
	Frequency: 10 ~ 55Hz, Amplitude 1.5mm	
Vibration Test	Direction: X, Y, Z; 2 hours each	

Rated current, speed, starting voltage, and mechanical noise must meet specifications after allowing the device to rest for 2 hours after test.

## This document contains data proprietary to PUI Audio Inc. Any use or reproduction, in any form, without prior written permission of PUI Audio Inc. is prohibited. ©2021, PUI Audio Inc.

# Dimensions

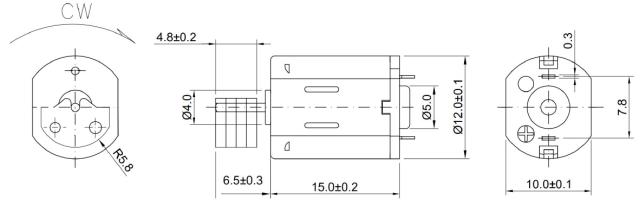

## Packaging

100 pcs/tray 20 trays/carton Qty/carton: 1000

<b>Specifications Revi</b>	sions
----------------------------	-------

Revision	Description	Date	Approved
А	RELEASED FROM ENGINEERING	12/13/2024	JD

Note:

- 1. Unless otherwise specified:
  - A. All dimensions are in millimeters.
  - B. Default tolerances are  $\pm 0.1$ mm and angles are  $\pm 3^{\circ}$ .
- 2. Specifications subject to change or withdrawal without notice.