




PUI audio



Data Sheet

SMI-1324-TW-5V-R


Features:

- 5Vdc Electro-Mechanical SMD Indicator
- 2400Hz Resonant Frequency
- Reflow and Wash Allowed


Specifications

Parameters	Values	Units
Rated Voltage	5	VDC
Operating Voltage Range	4 - 7	VDC
Current Draw at Rated Voltage	30Max.	mA
Minimum SPL @ 10cm	85	dBA
Resonant Frequency	2400 ± 300	Hz
Tone or Pulse Rate	Continuous Tone	-
Housing Material	PA46	-
Terminal Material	Sn plated Brass	-
Weight	2	Grams
Acceptable Soldering Methods	Hand Solder, Reflow Solder	See following pages for information
Environmental Compliances	ROHS/REACH	-
Moisture Sensitivity Level	Level 2	-
Storage Temperature	-40 to 85	°C
Operating Temperature	-40 to 85	°C

Measurement Method (Power=5Vdc, Distance=10cm)

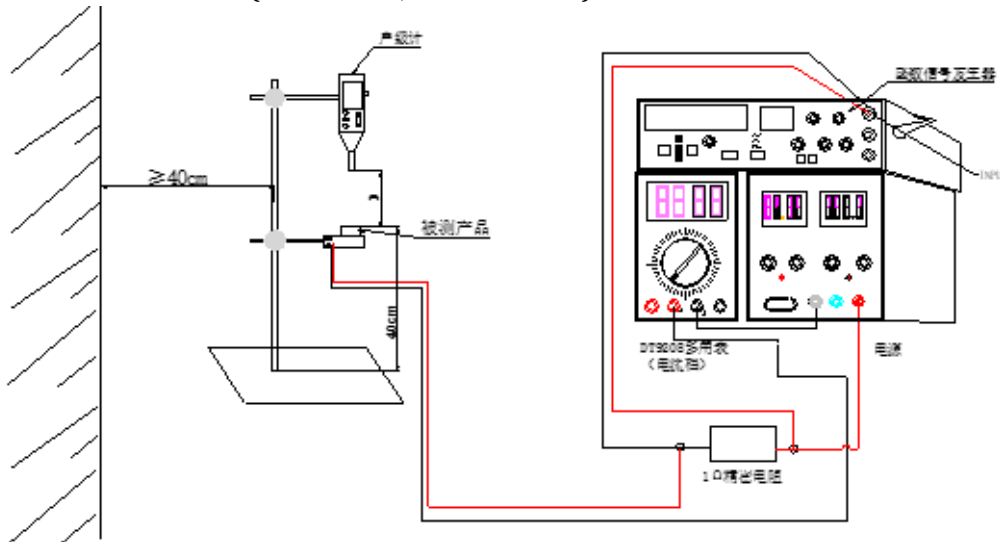

Typical SPL vs. Voltage Curve

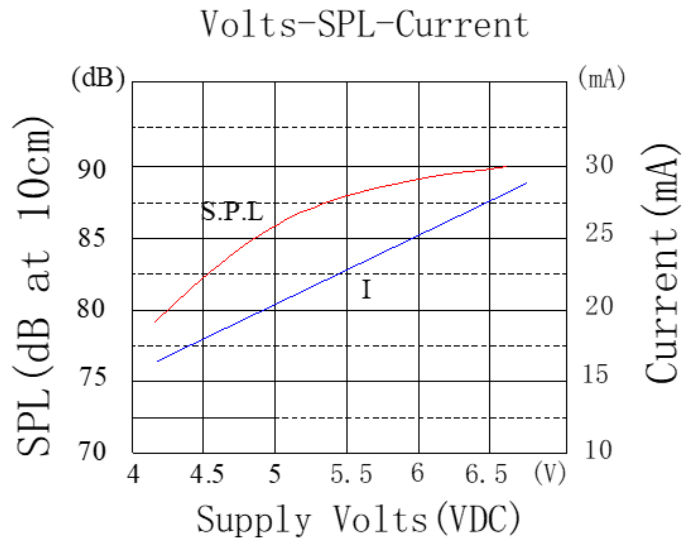


Reliability Testing


Type of Test	Test Specifications
Storage High Temperature Test	Storage in $+85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
Storage Low Temperature Test	Storage in $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
Humidity Test	Storage in $+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 90-95%RH test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
Temperature Cycle Testing	<p>Make this test for 5 cycles without applying power, then expose to the room temperature for 2 hours.</p>
Vibration Test	<p>Amplitude: 1.5mm Time: 1min/axis</p> <p>Make this test for the directions of X,Y, Z for 2 hours each (total 6 hours).</p>
Drop Test	Free drop a unit from the height 100cm to the surface of 10mm thick board, three directions(X,Y,Z).

After tests, SPL shall be within $\pm 5\text{dB}$


Recommended Reflow Profile

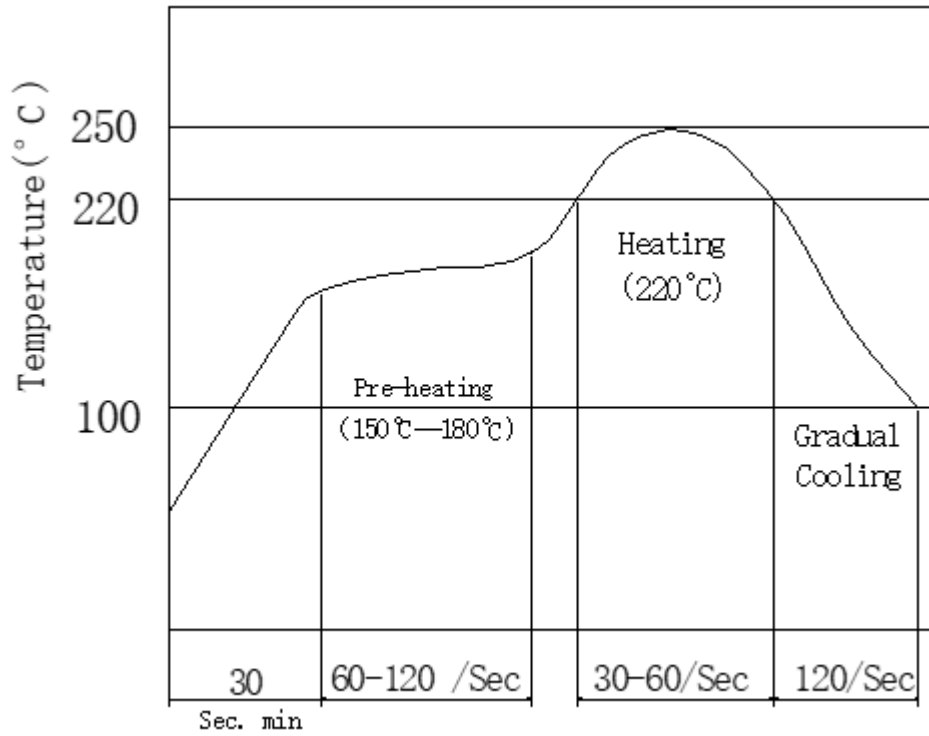


Dimensions

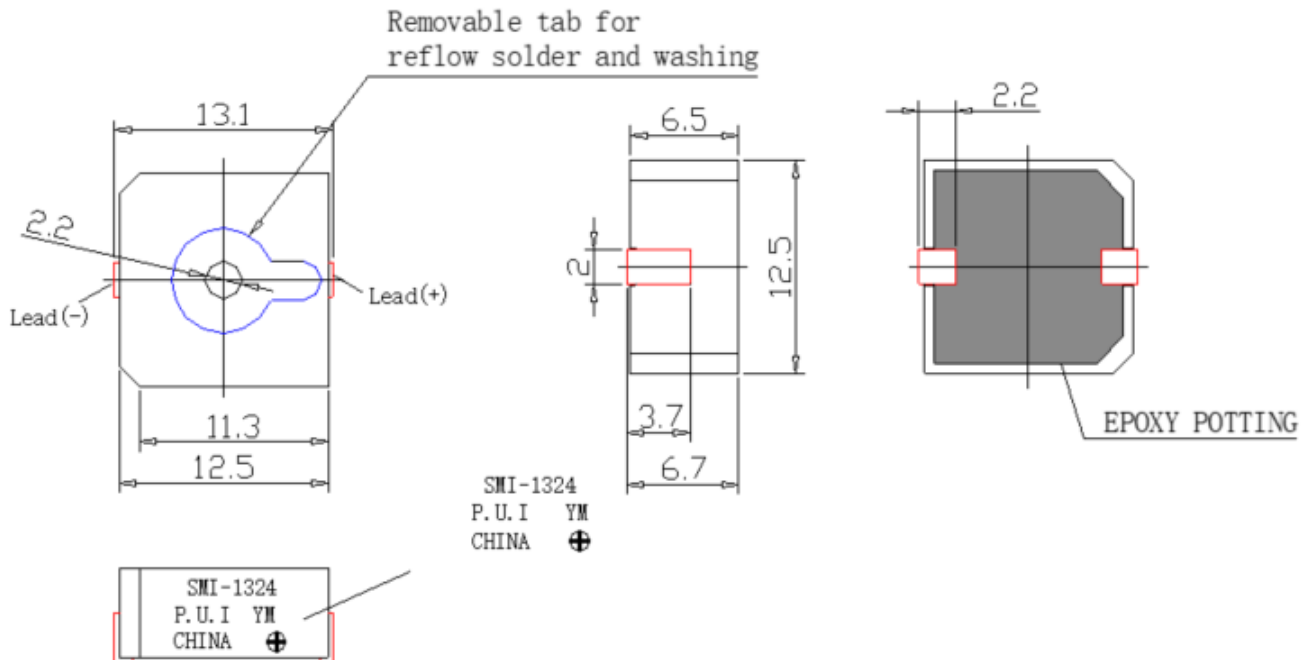


Recommended Land Pattern

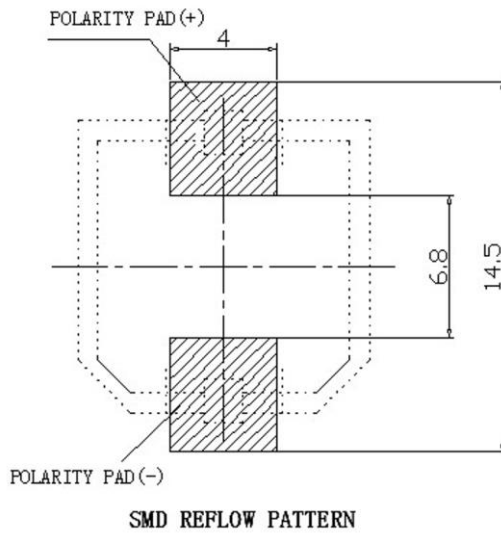

Packaging 50pcs Stick Tube

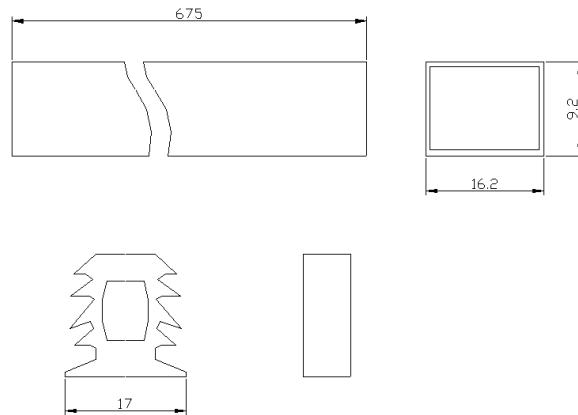

5000pcs master carton

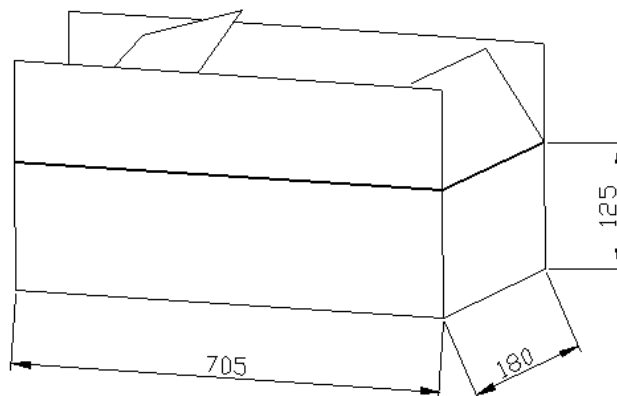

Specifications Revisions

Revision	Description	Date	Approved
-	Released from Engineering	04/07/2005	-
A	Revised Note 3 & 4	11/02/2005	BR
B	Revised to 3D template	06/01/2010	BR
C	Revised Temperature Ratings	20/28/2020	MV
D	Update Spec Format and Drawing Image, Add Details for Reliability, Packaging, etc.	08/08/2024	ML

Note:

1. Unless otherwise specified:
 - A. All dimensions are in millimeters.
 - B. Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
2. Specifications subject to change or withdrawal without notice.
3. This part is ROHS compliant.
4. Max reflow temperature is 260C for 10 seconds or less.